
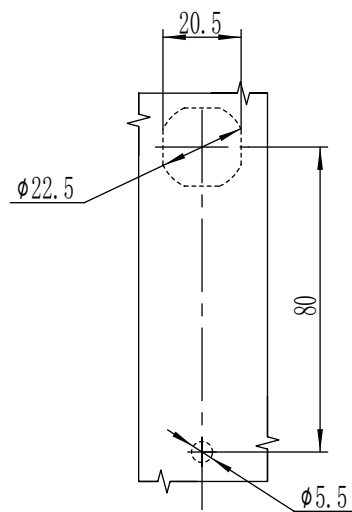
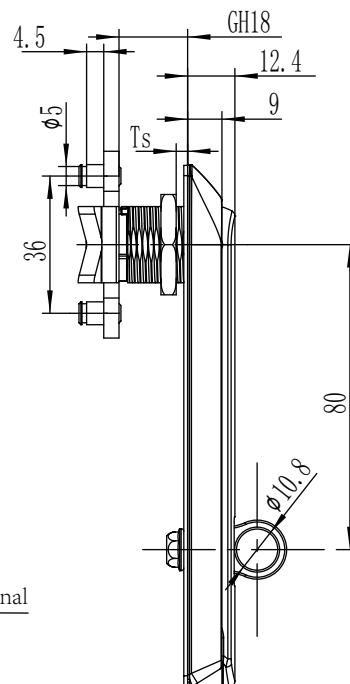


Swing handle lock

A-1107

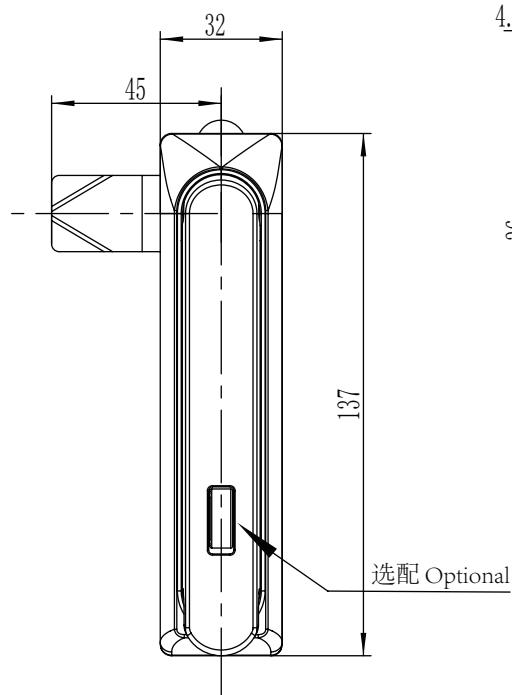

开孔尺寸
Panel cut out

WWW.FORNDLOCK.COM

请联系

图型 3D 模型

1. Material and surface treatment:
Lock body, handle: SUS304 or SUS316
Steel bolt: SUS304 or SUS316
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP54
Handle bearing tension value: $\leq 280\text{N}$
Handle bearing torque value: $\leq 42\text{N} \cdot \text{m}$
Maximum static load: 300N

1.材质及表面处理：
锁体，手柄：SUS304 或 SUS316
钢栓：铁镀锌或 SUS304 或 SUS316
密封圈：EPDM发泡胶。

2.性能参数:
防护等级: IP54
手柄承载拉力值: $\leq 280\text{N}$
手柄承载扭矩值: $\leq 42\text{N}\cdot\text{m}$
最大静载荷: 300N

不锈钢 Stainless steel	
带挂 Padlockable	不带挂 Without padlock
A-1107-10-A1	A-1107-20-A1