

Swing handle lock




A-1116



RL

IP65

IP65

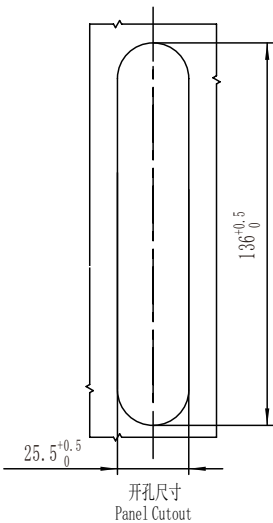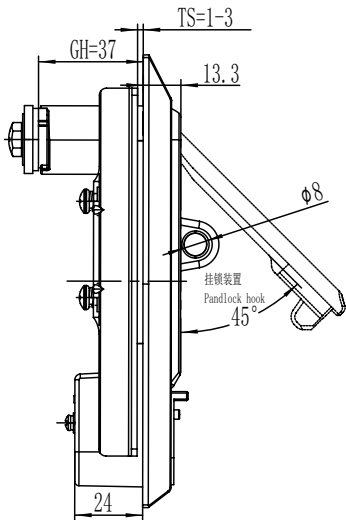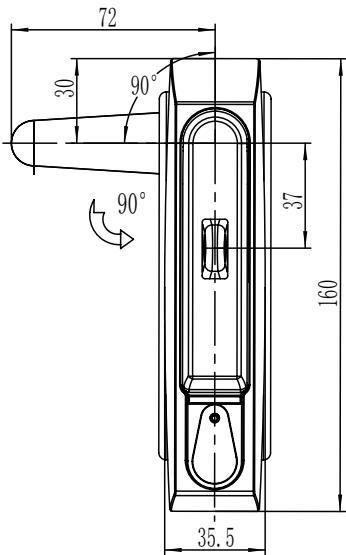

开孔尺寸
Panel Cutout

1. Material and surface treatment:
Lock body, handle dust cover : Zamak DIN-EN 1774-ZnAl4Cu1
Dust cover : SUS304
Steel bolt: iron galvanized
Sealing ring: EPDM foam.

2. performance parameter
Protection level: IP65
Handle bearing tension value: ≤ 310N
Handle bearing torque value: ≤ 33N.m
Maximum static load: 300N

3. Function Description:
Open the handle upwards and rotate it 90 ° to achieve opening
Can be equipped with a padlock

3. Remarks:
Optional dedicated key
Default K200 key

1.材质及表面处理:
锁体, 手柄: 5#锌合金
防尘盖: SUS304
钢栓: 铁镀锌
密封圈: EPDM发泡胶。

2.性能参数
防护等级: IP65
手柄承载拉力值: ≤ 310N
手柄承载扭矩值: ≤ 33N.m
最大静载荷: 300N

3.功能描述:
手柄向上打开, 90°旋转实现开启
可带挂锁

3.备注:
专用钥匙可选
默认 K200钥匙

粉末涂层黑 Powder coating black	纳米喷漆 (银亚光) NM spray painting (matte silver)
A-1116-40	A-1116-50