


A-1200

Rod Control Swinghandle

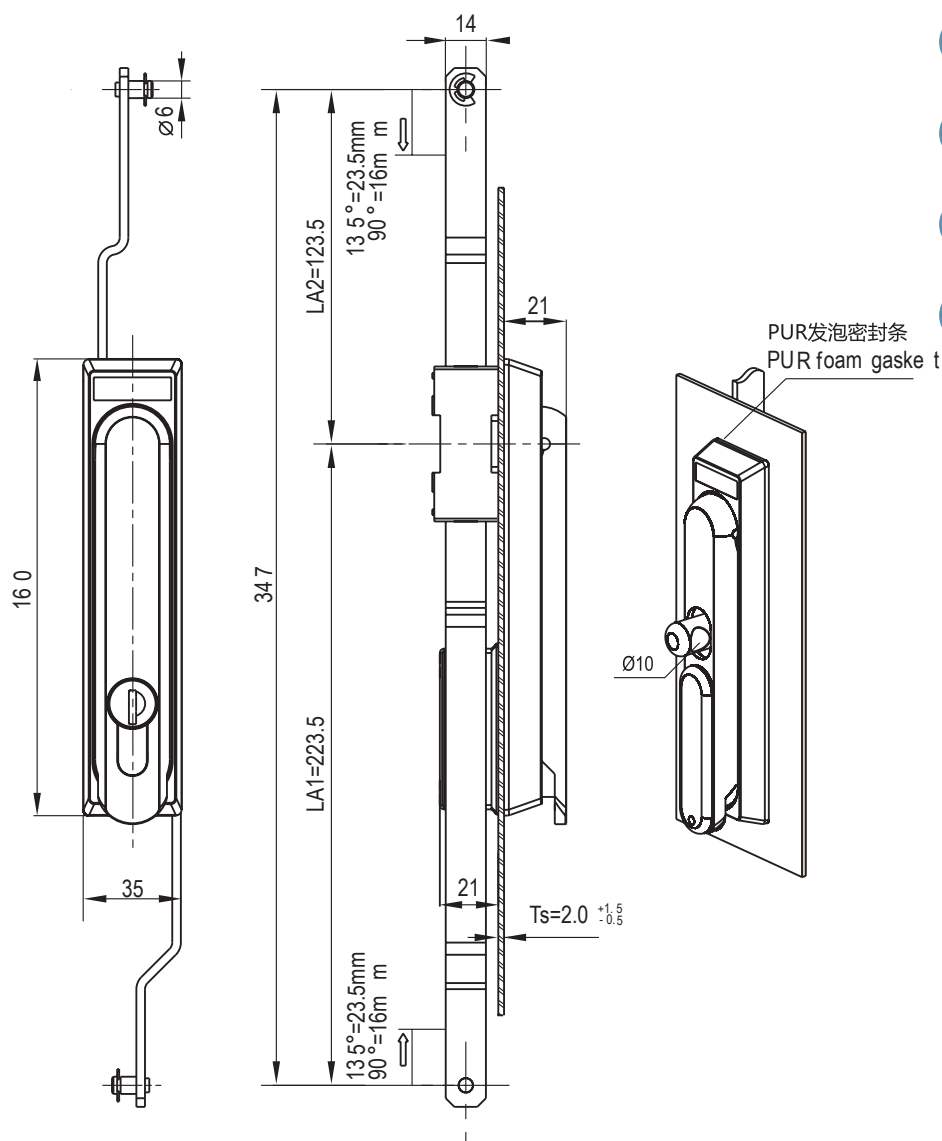

1. Material and surface treatment:
Lock body, handle, dust cover : Zamak
DIN-EN 1774-ZnAl4Cu1
Steel bolt: iron galvanized
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Handle bearing tension value: $\leq 400\text{N}$
Handle bearing torque value: $\leq 35\text{N}\cdot\text{m}$

4. Remarks:
Optional dedicated key
CH751 key optional
Can be equipped with stainless steel padlock
Default K333 key

1.材质及表面处理:
锁体,手柄,防尘盖: 5#锌合金喷塑黑
钢栓: 铁镀锌
密封圈: EPDM发泡胶。

2.性能参数:
防护等级: IP65
手柄承载拉力值: $\leq 400\text{N}$
手柄承载扭矩值: $\leq 35\text{N}\cdot\text{m}$

4.备注：
专用钥匙可选
CH751 钥匙可选
可配不锈钢挂锁
默认 K333 钥匙

选型 Model selection

A-1200-10YZ-333-42

1. 帶防尘盖: With Dustcap
2. 不带防尘盖: Without Dustcap

1. 帶挂: with padlock
2. 不帶挂: without padlock

42: 粉末涂层砂纹黑
42: Powder-coated sand texture black
A1 代表 SUS304
A1 represents SUS304

- 333.K333 钥匙 K333 Key
014. 双翅 4mm Double Bit 4mm
037: 三角 7mm 7mm Triangle
047: 四方 7mm 7mm Square-shaped

10: Version A(锁舌型 Cam control)
20: Version B(两点拉杆型 2P.rod control)
30: Version C(三点拉杆型 3P.rod control)