

Swing handle lock

A-1200






RL

IP65

NEW

锁舌
Cam

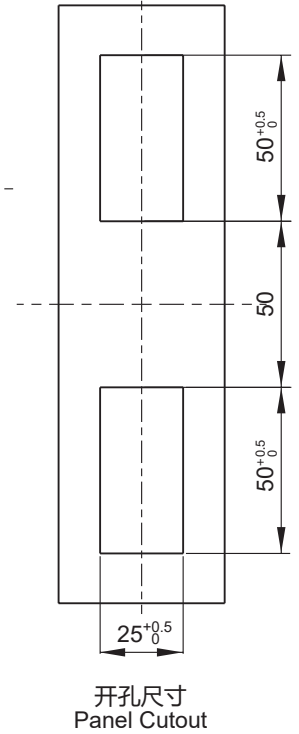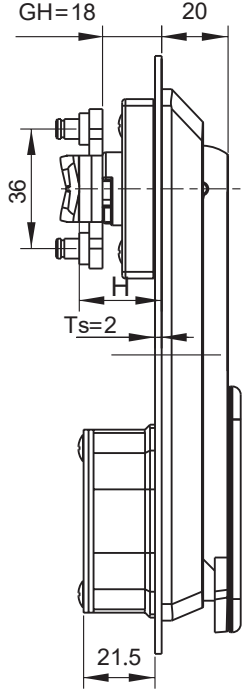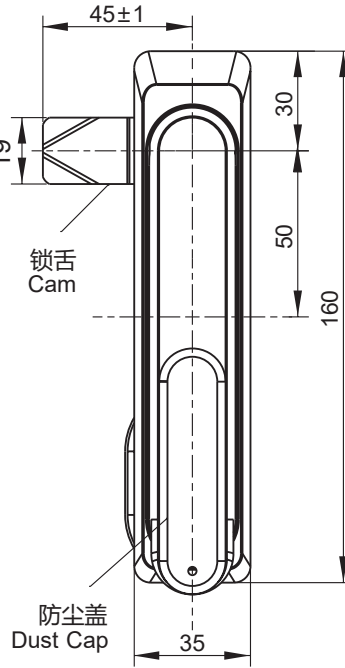

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM

1. Material and surface treatment:
Lock body, handle, dust cover : SUS304
Steel bolt: SUS304
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Handle bearing tension value: $\leq 400\text{N}$
Handle bearing torque value: $\leq 35\text{N} \cdot \text{m}$

3. Remarks:
Default Keyed K333

1. 材质及表面处理:
锁体, 手柄, 防尘盖: SUS304
钢栓: SUS304
密封圈: EPDM发泡胶。

2. 性能参数:
防护等级: IP65
手柄承载拉力值: $\leq 400\text{N}$
手柄承载扭矩值: $\leq 35\text{N} \cdot \text{m}$

4. 备注:
默认K333钥匙

选型 Model selection

A-1200-10YZ-333-42

- 1. 带防尘盖: With Dustcap
- 2. 不带防尘盖: Without Dustcap
- 1. 带挂: with padlock
- 2. 不带挂: without padlock
- 42: 粉末涂层砂纹黑
- 42: Powder-coated sand texture black
- A1 代表 SUS304
- A1 represents SUS304

- 10: Version A(锁舌型 Cam control)
- 20: Version B(两点拉杆型 2P.rod control)
- 30: Version C(三点拉杆型 3P.rod control)

- 333.K333 钥匙 K333 Key
- 014. 双翅 4mm Double Bit 4mm
- 037: 三角 7mm 7mm Triangle
- 047: 四方 7mm 7mm Square-shaped