


Swing handle lock

A-1201








RL

IP65

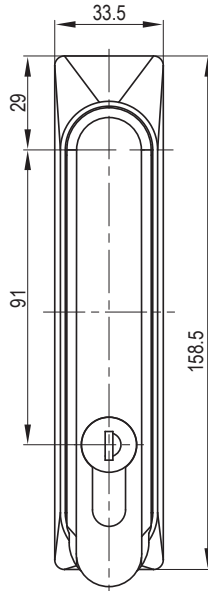

半圆柱 K333 相同钥匙
Alike K333 Proble Round Cylinder

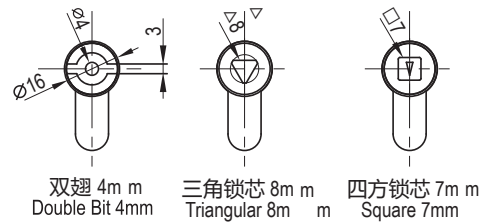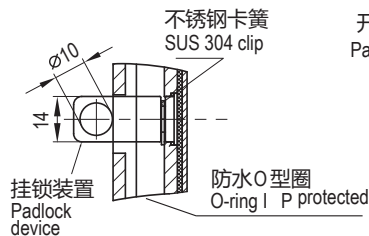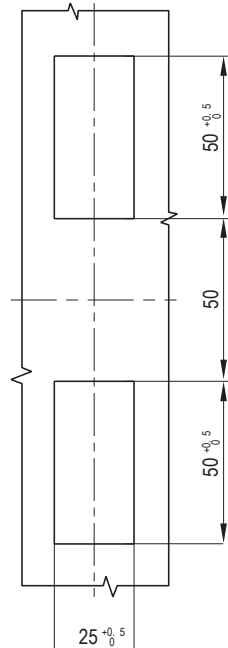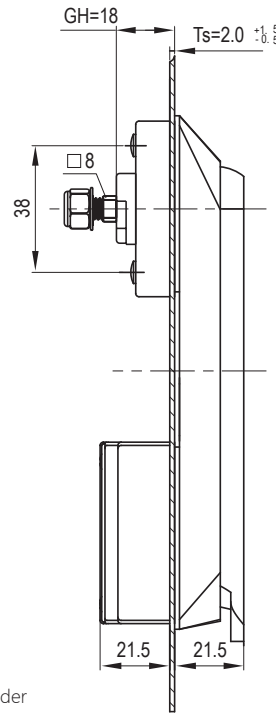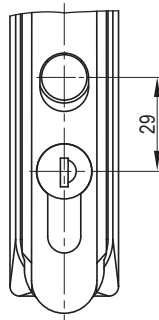

双翅 4m m Double Bit 4mm
三角锁芯 8m m Triangular 8m
四方锁芯 7m m Square 7mm

开孔尺寸
Panel Cutout

不锈钢卡簧
SUS 304 clip

防水O型圈
O-ring | P protected

挂锁装置
Padlock device

1.Material and surface treatment:
Lock body, handle, dust cover : Zamak
DIN-EN 1774-ZnAl4Cu1
Steel bolt: iron galvanized
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Handle bearing tension value: $\leq 400N$
Handle bearing torque value: $\leq 35N \cdot m$

4. Remarks:
Optional dedicated key
CH751 key optional
Can be equipped with stainless steel padlock
Default K333 key

1.材质及表面处理:
锁体, 手柄, 防尘盖: 5#锌合金喷塑黑
钢栓: 铁镀锌
密封圈: EPDM发泡胶。

2.性能参数:
防护等级: IP65
手柄承载拉力值: $\leq 400N$
手柄承载扭矩值: $\leq 35N \cdot m$

4.备注:
专用钥匙可选
CH751 钥匙可选
可配不锈钢挂锁
默认 K333 钥匙

选型 Model selection

A-1201-10YZ-333-42

1. 带防尘盖: With Dustcap
2. 不带防尘盖: Without Dustcap

1. 带挂: with padlock
2. 不带挂: without padlock

42: 粉末涂层砂纹黑
42: Powder-coated sand texture black

333.K333 钥匙 K333 Key
014. 双翅 4mm Double Bit 4mm
037: 三角 7mm 7mm Triangle
047: 四方 7mm 7mm Square-shaped

10: Version A(锁舌型 Cam control)
20: Version B(两点拉杆型 2P.rod control)
30: Version C(三点拉杆型 3P.rod control)