




Swing handle lock

A-1202



RL

IP65

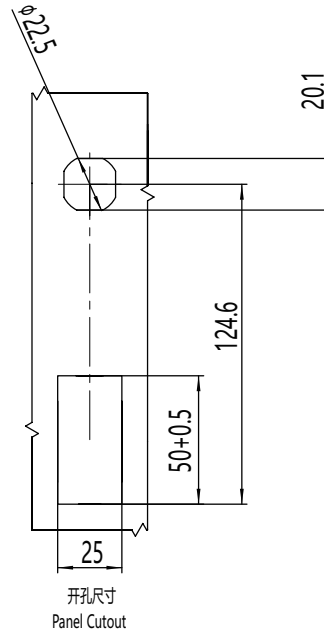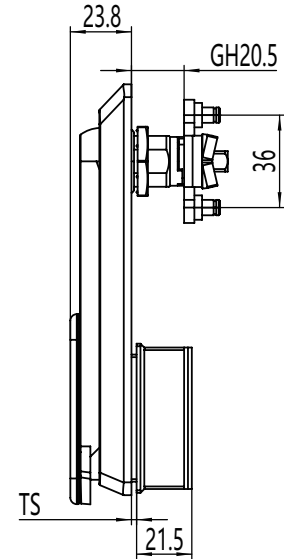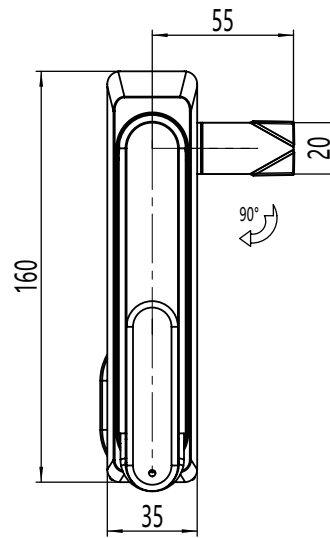

开孔尺寸
Panel Cutout

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM

1. Material and surface treatment:
Lock body, handle, dust cover : Zamak
DIN-EN 1774-ZnAl4Cu1 or SUS 304
Steel bolt: iron galvanized or SUS304
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Handle bearing tension value: $\leq 400\text{N}$
Handle bearing torque value: $\leq 35\text{N.m}$

3. Remarks:
Optional dedicated key
CH751 key optional
Can be equipped with stainless steel padlock
Default K333 key

1. 材质及表面处理:
锁体, 手柄, 防尘盖: 5# 锌合金喷塑黑或 SUS304
螺栓: 铁镀锌或 SUS304
密封圈: EPDM 发泡胶。

2. 性能参数: 防护等级: IP65
手柄承载拉力值: $\leq 400\text{N}$
手柄承载扭矩值: $\leq 35\text{N.m}$

3. 备注:
专用钥匙可选
CH751 钥匙可选
可配不锈钢挂锁
默认 K333 钥匙

选型 Model selection

A-1202-10YZ-333-42

1. 带防尘盖: With Dustcap
2. 不带防尘盖: Without Dustcap

1. 带挂: with padlock
2. 不带挂: without padlock

42: 粉末涂层砂纹黑
42: Powder-coated sand texture black
A1 代表 SUS304
A1 represents SUS304

333.K333 钥匙: K333 Key
014. 双翅 4mm Double Bit 4mm
037: 三角 7mm 7mm Triangle
047: 四方 7mm 7mm Square-shaped

10: Version A(锁舌型 Cam control)