

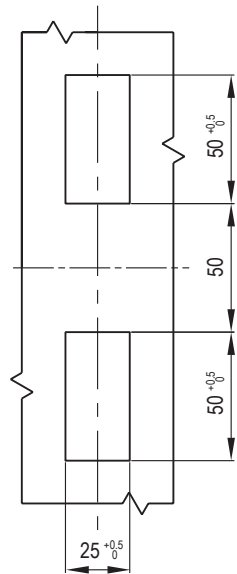


Rod Control Swinghandle A-1210

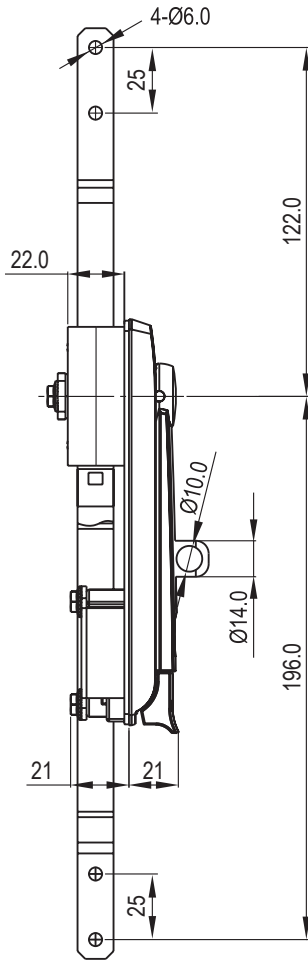

RL

IP65

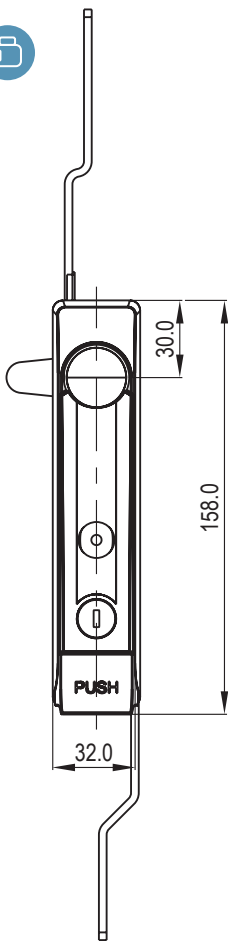

开孔尺寸
Panel Cutout

WWW.FORNDLOCK.COM
如需获得产品3D模型图，请联系

- 1.Material and surface treatment:
Lock body, handle, dust cover : Zamak
DIN-EN 1774-ZnAl4Cu1
Steel bolt: iron galvanized
Sealing ring: EPDM foam.
2. Performance parameters:
Protection class: IP65
Handle bearing tension value: $\leq 295\text{N}$
Handle bearing torque value: $\leq 25\text{N.m}$
Maximum static load: 270N
- 3.Remark:
Padlockable on request

- 1.材质及表面处理:
锁体, 手柄, 防尘盖: 5#锌合金喷塑黑
螺栓: 铁镀锌
密封圈: EPDM发泡胶。
- 2.性能参数:
防护等级: IP65
手柄承载拉力值: $\leq 295\text{N}$
手柄承载扭矩值: $\leq 25\text{N.m}$
最大静载荷: 270N
- 3.备注:
可配挂锁

Version C(三点拉杆型 3Prod control)		
	带挂 Padlockable	不带挂 Without padlock
麻面黑 Black Textured powder coated	A-1210-3011-40	A-1210-3001-40