


Swing handle lock

A-1218

RL

IP65

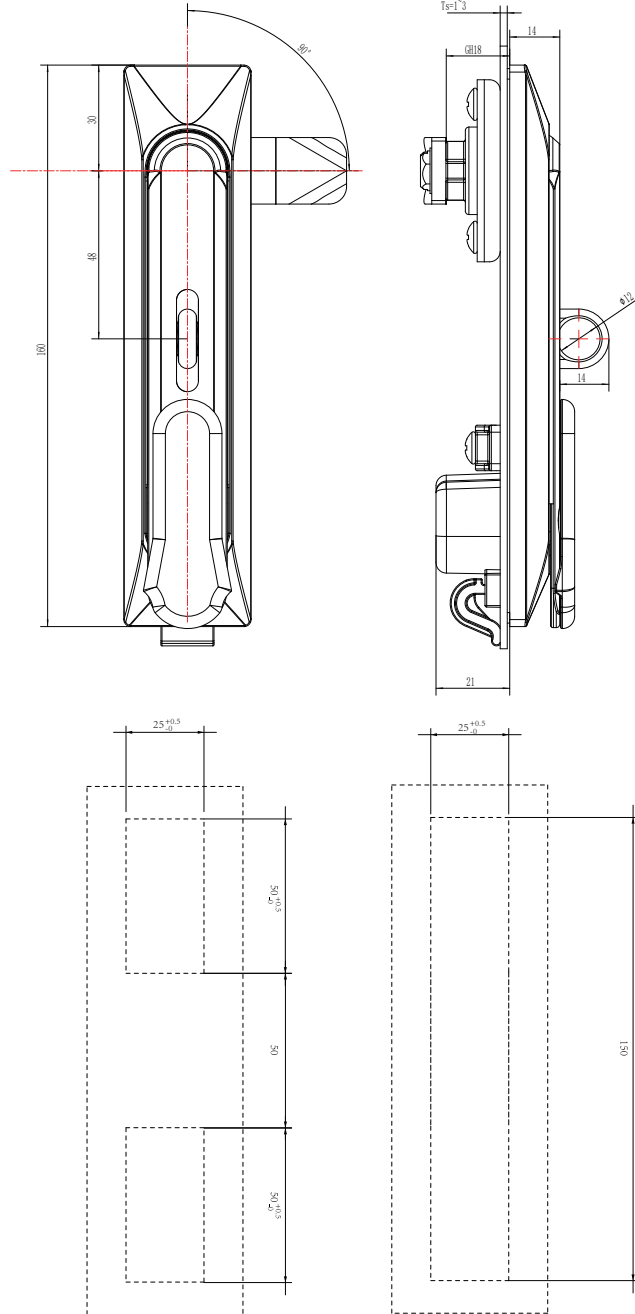

1. Material and surface treatment:
Lock body, handle, dust cover: 5# zinc alloy, black powder-coated
Steel bolt: Iron galvanized
Sealing ring: EPDM foam rubber

2. Performance parameters:
Protection level: IP65
Handle tensile load capacity: $\leq 400\text{N}$
Torque capacity of the handle: $\leq 25\text{N.m}$

3. Note: Optional dedicated key
CH751 Key optional
It can be equipped with a stainless steel padlock
Default K333 key
Door panel thickness: TS2~0.5mm;

1.材质及表面处理:
锁体, 手柄, 防尘盖: 5#锌合金喷塑黑
钢栓: 铁镀锌
密封圈: EPDM发泡胶

2.性能参数:
防护等级: IP65
手柄承载拉力值: $\leq 400\text{N}$
手柄承载扭矩值: $\leq 25\text{N.m}$

3.备注: 专用钥匙可选
CH751 钥匙可选
可配不锈钢挂锁
默认 K333 钥匙
门板厚度: TS2~0.5mm;

选型 Model selection

A-1218-10YZ-333-42

1. 带防尘盖: With Dustcap
2. 不带防尘盖: Without Dustcap

1. 带挂: with padlock
2. 不带挂: without padlock

42: 粉末涂层砂纹黑
42: Powder-coated sand texture black

10: Version A(锁舌型 Cam control)
20: Version B(两点拉杆型 2P.rod control)
30: Version C(三点拉杆型 3P.rod control)

333.K333 钥匙 K333 Key
014. 双翅 4mm Double Bit 4mm
037: 三角 7mm 7mm Triangle
047: 四方 7mm 7mm Square-shaped