
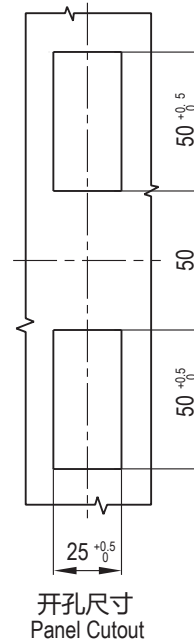


## A-1219

## Rod Control Swinghandle

RL

IP65

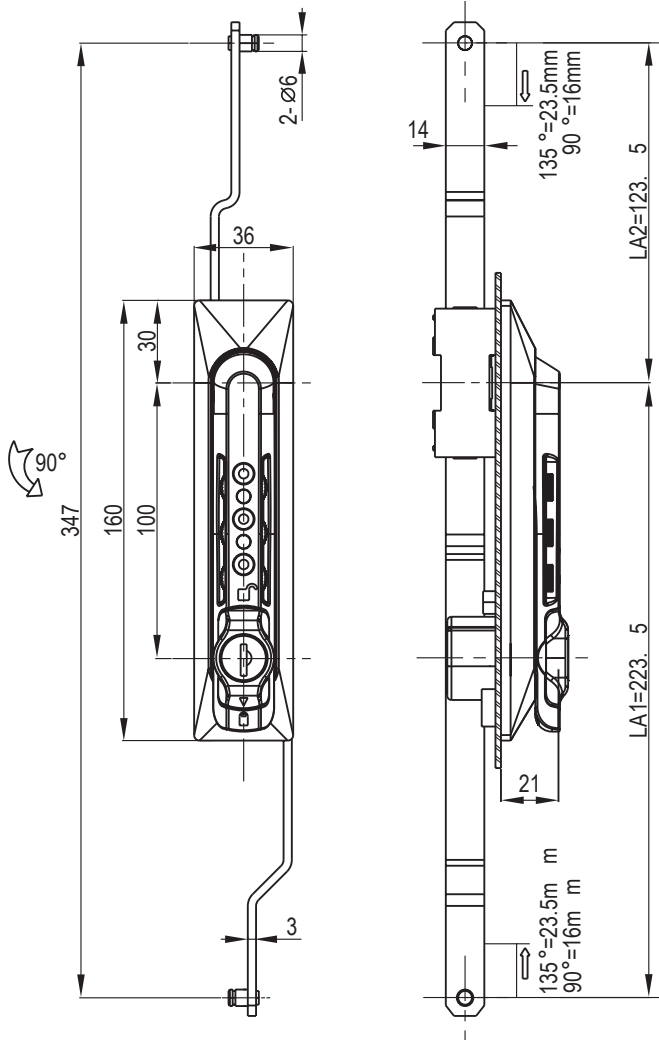

1. Material and surface treatment:  
Lock body, handle: PA66+30%GF;  
Zamak DIN-EN 1774-ZnAl40Cu1  
Steel bolt: iron galvanized  
Sealing ring: EPDM foam.

2. Performance parameters:  
Protection class: IP65  
Handle bearing tension value:  $\leq 60\text{N}$   
Handle bearing torque value:  $\leq 5\text{N}\cdot\text{m}$

3. Remark:  
Key different on request  
CH751 key code on request  
Default keyed K333

1. 材质及表面处理:  
锁体, 手柄: PA66+30%GF  
钢栓: 铁镀锌  
密封圈: EPDM发泡胶。

2. 性能参数:  
防护等级: IP65  
手柄承载拉力值:  $\leq 60\text{N}$   
手柄承载扭矩值:  $\leq 5\text{N}\cdot\text{m}$

3. 备注:  
专用钥匙可选  
CH751 钥匙可选,  
默认K333钥匙

WWW.FORNDLOCK.COM

如需获得产品 3D 模型图，请联系

| Version B (2点拉杆型 2Prod cotrol) | Version C (三点拉杆型 3Prod control) |
|--------------------------------|---------------------------------|
| A-1219-2001-60                 | A-1219-3001-60                  |