
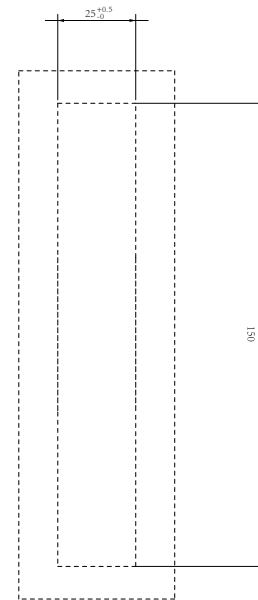
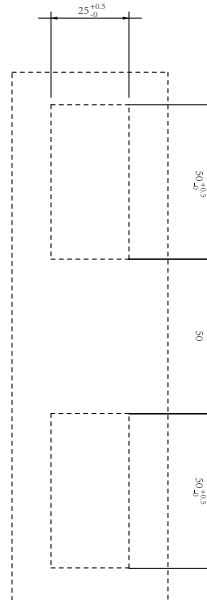
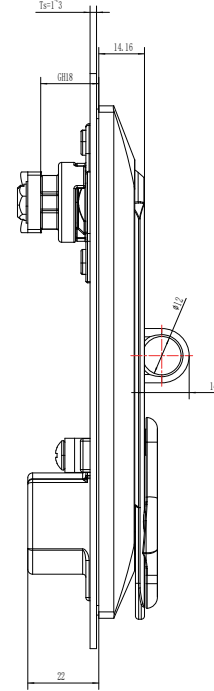


## Swing handle lock

## A-1220

RL

IP65

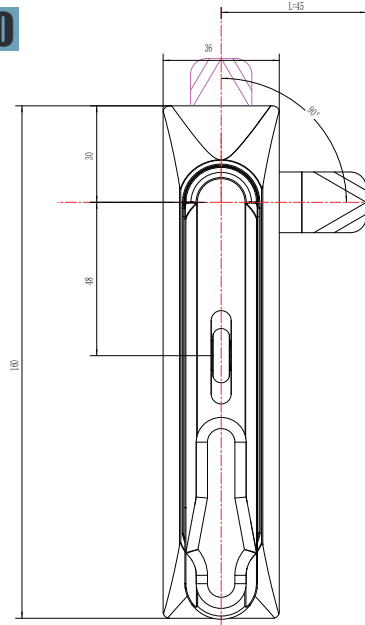

WWW.FORNDLOCK.COM

如需获得产品3D模型图，请联系

1. Material and surface treatment:  
Lock body, handle, dust cover: SUS304  
Steel bolt: Iron galvanized  
Sealing ring: EPDM foam rubber

2. Performance parameters:  
Protection level: IP65  
Handle load capacity:  $\leq 400N$   
Torque capacity of the handle:  $\leq 25N.m$

3. Note: A dedicated key is optional  
CH751 Key optional  
Can be equipped with stainless steel padlock  
Default K333 key  
Door panel thickness: TS2~0.5mm;

1.材质及表面处理:  
锁体, 手柄, 防尘盖: SUS304  
钢栓: 铁镀锌  
密封圈: EPDM发泡胶

2.性能参数:  
防护等级: IP65  
手柄承载拉力值:  $\leq 400N$   
手柄承载扭矩值:  $\leq 25N.m$

3.备注: 专用钥匙可选  
CH751 钥匙可选  
可配不锈钢挂锁  
默认 K333 钥匙  
门板厚度: TS2~0.5mm;

## 选型 Model selection

## A-1220-10YZ-333-42

1. 带防尘盖: With Dustcap  
2. 不带防尘盖: Without Dustcap

1. 带挂: with padlock  
2. 不带挂: without padlock

42: 粉末涂层砂纹黑  
42: Powder-coated sand texture black

333.K333 钥匙 K333 Key  
014. 双翅 4mm Double Bit 4mm  
037: 三角 7mm 7mm Triangle  
047: 四方 7mm 7mm Square-shaped

10: Version A( 锁舌型 Cam control)  
20: Version B( 两点拉杆型 2P.rod control)  
30: Version C( 三点拉杆型 3P.rod control)