

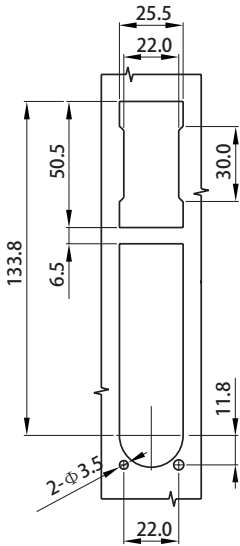
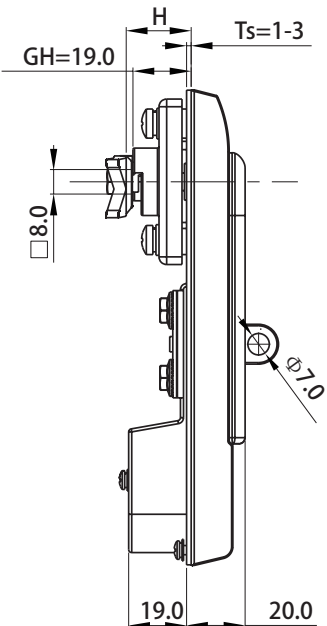


Swing handle lock

A-1234

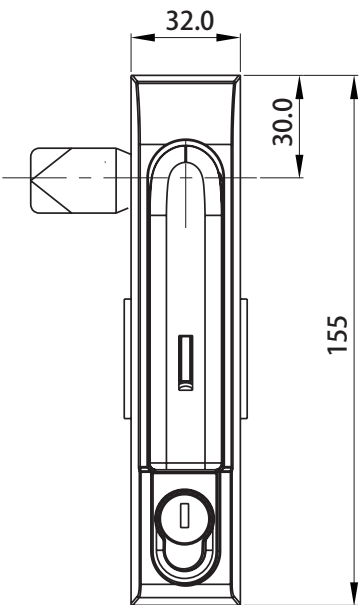

开孔尺寸
Panel cutout

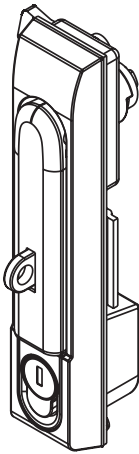

WWW.FORNDLOCK.COM

如需获得产品3D模型图，请联系

- 1.Material and surface treatment:
Lock body, handle, dust cover : Zamak
DIN-EN 1774-ZnAl4Cu1
Steel bolt: iron galvanized
Sealing ring: EPDM foam.
2. Performance parameters:
Protection class: IP65
Handle bearing tension value: ≤ 225N
Handle bearing torque value: ≤ 20N. m
Maximum static load: 270N
- 3.Remark:
Padlockable on request
Interchangeable profile cylinder Padlockable on request

- 1.材质及表面处理:
锁体, 手柄, 防尘盖 5#锌合金喷塑黑
钢栓: 铁镀锌
密封圈: EPDM发泡胶
- 2.性能参数: 防护等级: IP65
手柄承载拉力值: ≤ 225N
手柄承载扭矩值: ≤ 20N.m
最大静载荷: 270N

- 3.备注:
可配挂锁
锁头可换

	Version A (锁舌型 Cam control)	
	不带挂 Without padlock	带挂 Padlockable
喷塑黑 Black Powder Coated	A-1234-1001-40	A-1234-1011-40
纳米喷漆 (银亚光)NM spray painting(matte silver)	A-1234-1001-50	A-1234-2011-50