



Rod Control Swinghandle

A-1234




RL

IP65

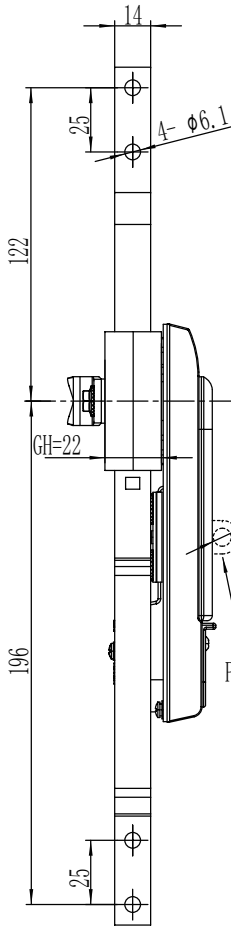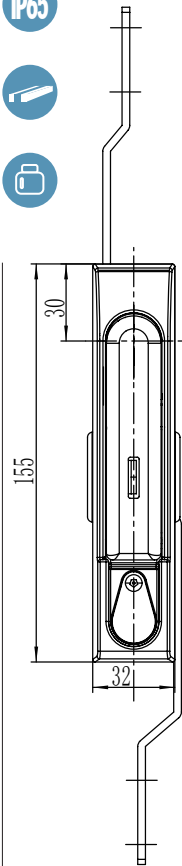

可配挂锁
Padlock available

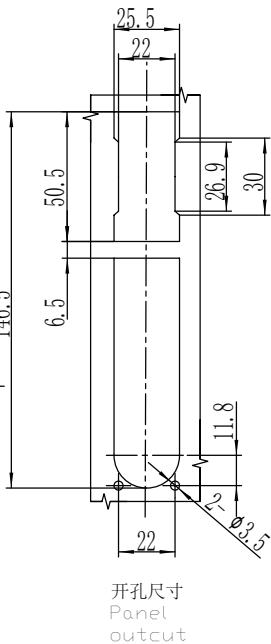

开孔尺寸
Panel
outcut

WWW.FORNDLOCK.COM

如需获得产品3D模型图，请联系

1.Material and surface treatment:
Lock body, handle, dust cover : Zamak
DIN-EN 1774-ZnAl4Cu1
Steel bolt: iron galvanized
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Handle bearing tension value: $\leq 225\text{N}$
Handle bearing torque value: $\leq 20\text{N} \cdot \text{m}$
Maximum static load: 270N

3.Remark:
Padlockable on request
Interchangeable profile cylinder Padlockable on request

1.材质及表面处理:
锁体, 手柄, 防尘盖 5#锌合金喷塑黑
钢栓: 铁镀锌
密封圈: EPDM发泡胶

2.性能参数: 防护等级: IP65
手柄承载拉力值: $\leq 225\text{N}$
手柄承载扭矩值: $\leq 20\text{N} \cdot \text{m}$
最大静载荷: 270N

3.备注:
可配挂锁
锁头可换

	Version B(两点拉杆型 2Prod control)		Version C(三点拉杆型 3Prod control)	
	不带挂 Without padlock	带挂 Padlockable	不带挂 Without padlock	带挂 Padlockable
喷塑黑 Black Powder Coated	A-1234-2002-40	A-1234-2012-40	A-1234-3002-40	A-1234-3012-40
纳米喷漆 (银亚光)NM spray painting(matte silver)	A-1234-2002-50	A-1234-2012-50	A-1234-3002-50	A-1234-3012-50