



lever compression latch



A-1446

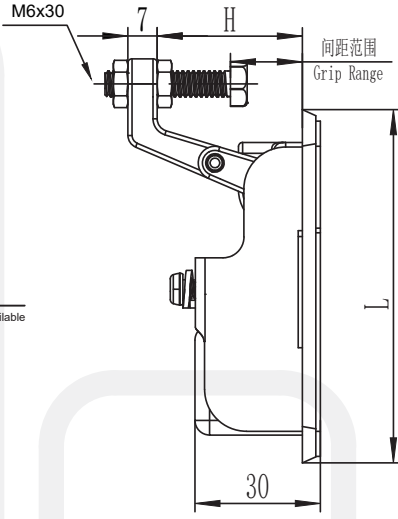

IP65

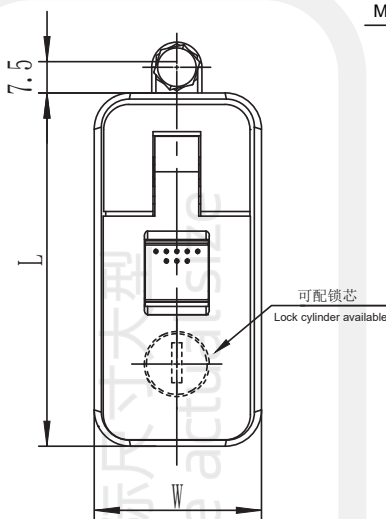

A-1446-110

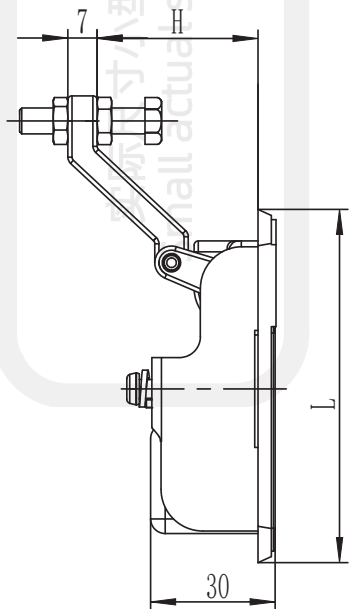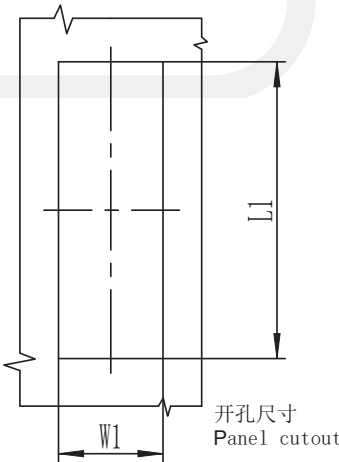

A-1446-210

WWW.FORNDLOCK.COM
如需获得产品3D模型图，请联系

1. Material and surface treatment:
Lock body, handle: Zamak DIN-EN 1774-ZnAl4Cu1
Steel bolt: iron galvanized
Sealing ring: EPDM foam.
2. Performance parameters:
Protection class: IP65
Handle bearing tension value: $\leq 750\text{N}$
Maximum static load: 200N

3. Remark:
Default CH751 key code

1. 材质及表面处理:
锁体, 手柄: 5# 锌合金
钢栓: 铁镀锌
密封圈: EPDM 发泡胶。

2. 性能参数:
防护等级: IP65
手柄承载拉力值: $\leq 790\text{N}$
最大静载荷: 290N

3. 备注:
默认 CH751 钥匙

尺寸 Size	L	W	L1	W1	H
小型 Small	85mm	40mm	71mm	25mm	20-35mm
大型 Large	109mm	56mm	90.5mm	35mm	20-32mm

尺寸 Size	喷塑亚光黑 Black powder coated		亮铬 Bright Chrome	
	不带锁芯型 Non-locking	CH751 locking with shutter	不带锁芯型 Non-locking	CH751 locking with shutter
小型 Small	A-1446-100-40	A-1446-110-40	A-1446-100-30	A-1446-110-30
大型 Large	A-1446-200-40	A-1446-210-40	A-1446-200-30	A-1446-210-30