
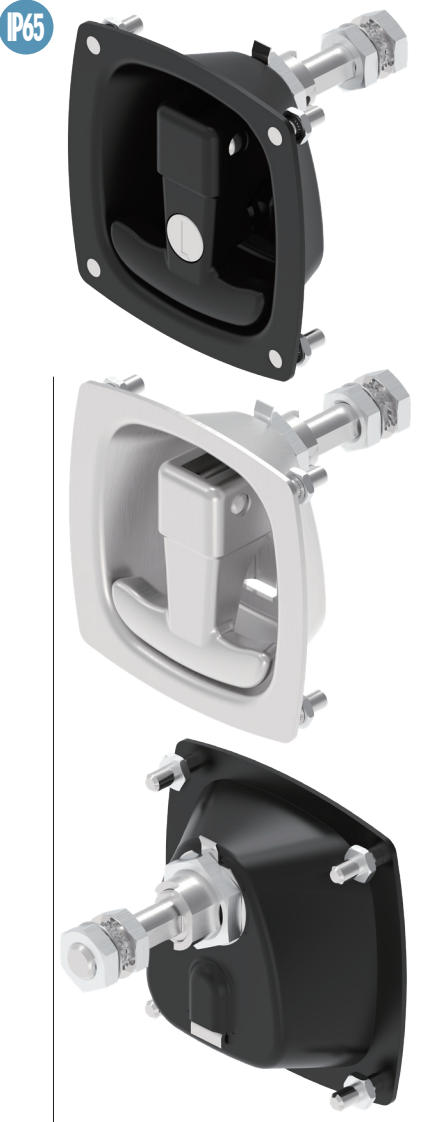


A-1547 Heavy Duty Lift & Turn Compression Latches

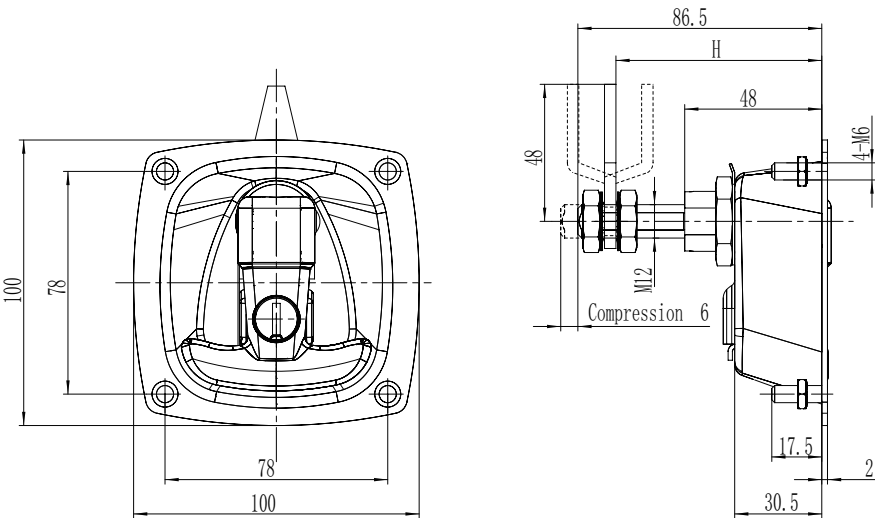

开孔尺寸
Cut out

1. Material and surface treatment:
Lock body, handle: Zamak DIN-EN 1774-ZnAl4Cu1 or SUS304
Steel bolt: iron galvanized
Sealing ring: EPDM foam.
2. Performance parameters:
Protection class: IP65
Compression force: 6.4mm
Maximum static load: 1000N
3. Remark:
Default CH751 key code

1. 材质及表面处理:
锁体, 手柄: 5#锌合金 或 SUS304
钢栓: 铁镀锌
密封圈: EPDM发泡胶。
2. 性能参数:
防护等级: IP65
压紧力: 6.4mm
最大静载荷: 1000N
3. 备注:
默认 CH751 钥匙

WWW.FORNDLOCK.COM

如需获得产品 3D 模型图 , 请联系

间距 Grip Range		锌合金 Zinc alloy		SUS304	
最小 MIN	最大 MAX	CH751 钥匙锁定 CH751 keylocking	不带钥匙锁 Non-locking	CH751 钥匙锁定 CH751 keylocking	不带钥匙锁 Non-locking
28	43	A-1547-1010-40	A-1547-2010-40	A-1547-1010-A1	A-1547-2010-A1
43	58	A-1547-1020-40	A-1547-2020-40	A-1547-1020-A1	A-1547-2020-A1
58	73	A-1547-1030-40	A-1547-2030-40	A-1547-1030-A1	A-1547-2030-A1
73	88	A-1547-1040-40	A-1547-2040-40	A-1547-1040-A1	A-1547-2040-A1
88	104	A-1547-1050-40	A-1547-2050-40	A-1547-1050-A1	A-1547-2050-A1