


RV door latch



B-1602




IP40

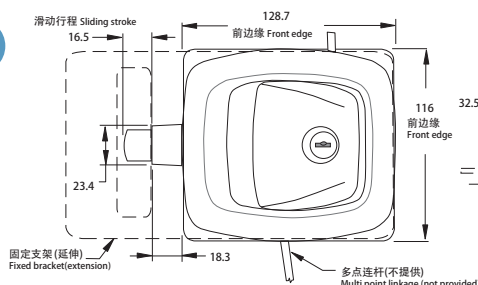


多点功能 Multipoint functionality
不提供驱动连杆推荐的连杆配置如下所示
The recommended connecting rod configuration
without providing a drive linkage is as follows

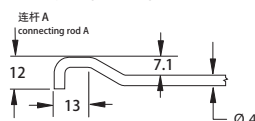



标准支架Standard bracket

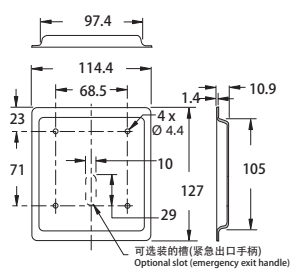

延伸的支架Extended bracket

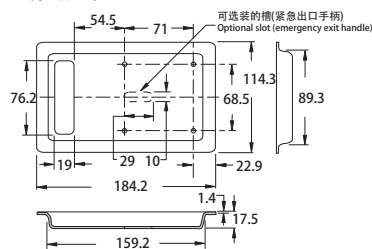


U型支架 U-shaped bracket
(包含用于紧急出口手柄的槽)
(Contains slots for emergency exit handles)


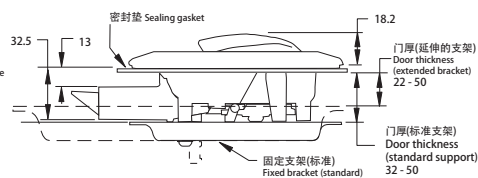
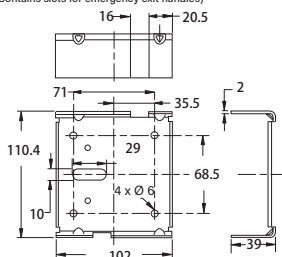


处于驱动(未锁定)位置的门锁,如图(滑块缩回)
Door lock in the drive (unlocked) position, as shown in
the figure (slide retracted)

后视图Rear View

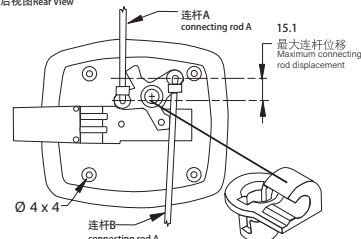

塑料夹Folder:
零件号Part number:
R4-0-43922, 可用于4mm连杆
R4-0-43922, Can be used for 4mm
connecting rods

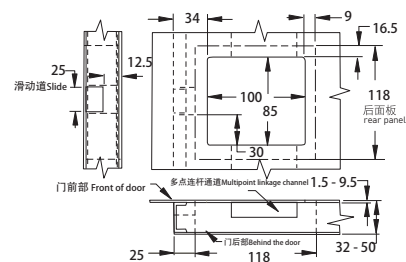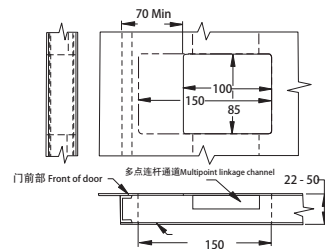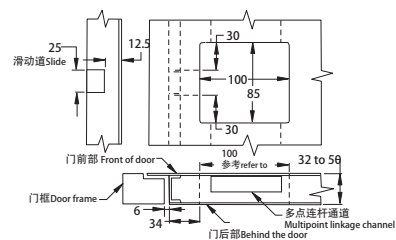

1. Material and surface treatment:
Lock body, handle : Zamak DIN-EN 1774-ZnAl4Cu1
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP40

3. Remarks:
Optional dedicated key
Default CH751 key

- 1.材质及表面处理：
锁体，手柄：5#锌合金
密封圈：EPDM发泡胶。

- 2.性能参数：防护等级：IP40

- 3.备注：
专用钥匙可选
默认 CH751 钥匙

	锌合金 Zinc alloy	
	喷塑黑 Powder coating black	亮铬 Bright chrome plating
CH751 钥匙锁定 CH751 key locking	B-1602-10-40	B-1602-10-30
无钥匙锁芯 Non-locking	B-1602-20-40	B-1602-20-30