


hygienic lock **C3-1578M**






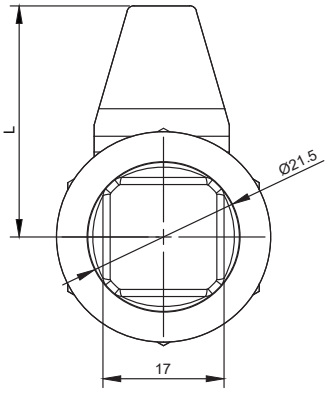

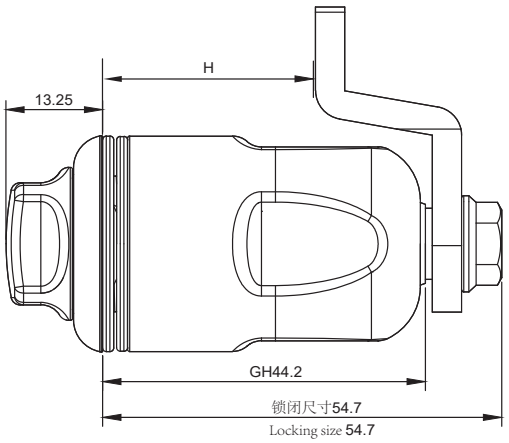



锁芯 Cylinder

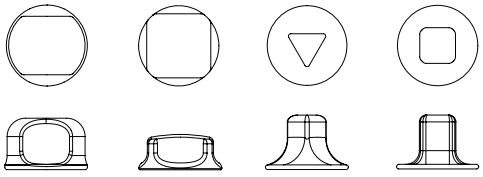

选型 Model selection

锁芯选型
Lock cylinder selection

A1 代表 SUS304
A1 represents SUS304
A2 代表 SUS316
A2represents SUS316

C3-1578M-SX-LH-A1L

无 M 门外单防护
No M door single protection
有 M 门内外双防护
Double protection inside and outside doors

L 代表钢栓长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

旋转 Rotate



顺时针锁紧
Clockwise locking

逆时针锁紧
Lock counterclockwise

1.Material and surface treatment:
Main body, Steel bolt: SUS316
Sealing ring: silica gel

2. Performance parameters:
Protection class: IP69K
Unlocking torque: ≤ 0.79N/M
Ultimate load: 700N
Tensioning and stretching amount: 7mm

3. Installation instructions:
Fixed screw torque 10N. M
Fixed nut torque 17N. M
Applicable door panel thickness: 1-15mm

1.材质及表面处理:
主体 ,钢栓: SUS316
密封圈: 硅胶

2.性能参数:
防护等级: IP69K
解锁扭矩: 小于等于 0.79N/M
极限载荷: 700N
拉紧伸缩量: 7mm

3.安装说明:
固定螺丝扭矩 10N.M
固定螺母扭矩 17N.M
适用门板厚度: 1-15mm

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM