

compression cam latch **C4-1594**








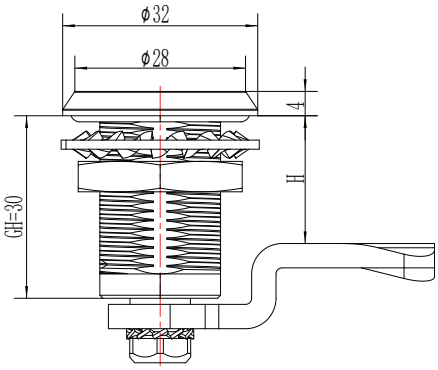

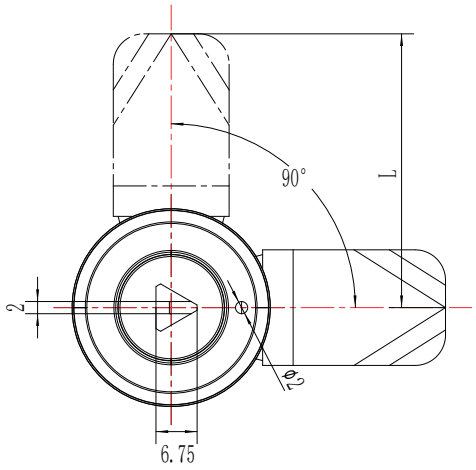



1. Material and surface treatment:
Lock shell: 6061-T6, hard oxide black
Lock core, shaft, and tongue: SUS304 or SUS316
Sealing ring: EPDM foam rubber.

2. Performance parameters:
Protection level: IP66
Unlocking torque: less than or equal to 0.79N/m
Ultimate load: 700N
Tightening and shrinking amount: 6mm


3. Installation instructions:
Fixed screw torque 10N. M
Fixed nut torque 17N. M
Applicable door panel thickness: 1-15mm

1.材质及表面处理:
锁壳：6061-T6，硬质氧化黑
锁芯、转轴、锁舌：SUS304或 SUS316
密封圈：EPDM发泡胶。

2.性能参数:
防护等级：IP66
解锁扭矩：小于等于 0.79N/M
极限载荷：700N
拉紧伸缩量：6mm

3.安装说明:
固定螺丝扭矩 10N.M
固定螺母扭矩 17N.M
适用门板厚度：1-15mm

锁芯 Cylinder



选型 Model selection


锁芯选型
Lock cylinder selection

A1 代表 SUS304
A1 represents SUS304
A2 代表 SUS316
A2represents SUS316
A3 代表 6061 铝合金
A3represents 6061 aluminum alloy

C4-1594-SX-LH-A3L

L 代表钢栓长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

旋转 Rotate



如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM