
Forndlock

圆柱拉紧锁
compression cam latch

C6-1502 compression cam latch





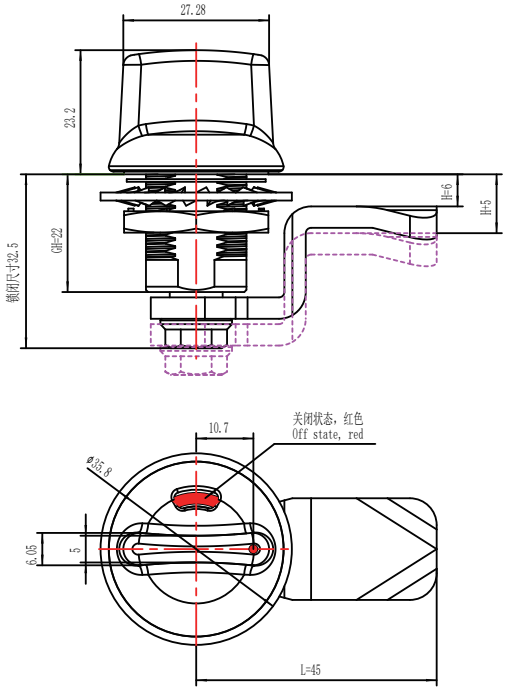

选型 Model selection

锁芯选型
Lock cylinder selection

40 粉末涂层黑
40 Powder coating is black

C6-1502-SX-LH-40L

L 代表钢栓长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

旋转 Rotate



顺时针锁紧
Clockwise locking

逆时针锁紧
Lock counterclockwise

1.Material and surface treatment:
Main body, Steel bolt: Zinc alloy
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Unlocking torque: ≤ 0.79N/M
Ultimate load: 700N
Tensioning and stretching amount: 5mm

3. Installation instructions:
Fixed screw torque 10N. M
Fixed nut torque 17N. M
Applicable door panel thickness: 1-15mm

1.材质及表面处理:
主体,钢栓：锌合金
密封圈：EPDM发泡胶。

2.性能参数:
防护等级：IP65
解锁扭矩：小于等于 0.79N/M
极限载荷：700N
拉紧伸缩量：5mm

3.安装说明:
固定螺丝扭矩 10N.M
固定螺母扭矩 17N.M
适用门板厚度：1-15mm

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM