

Forndlock

圆柱拉紧锁
compression cam latch

C6-1573 compression cam latch

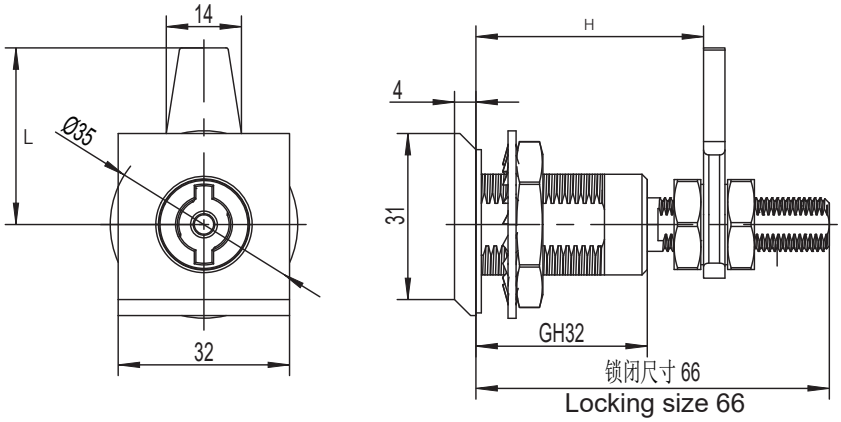




RL

IP65





锁芯 Cylinder



150 013 537 538 547 548 068 060 024

选型 Model selection

锁芯选型
Lock cylinder selection

A1 代表 SUS304
A1 represents SUS304
A2 代表 SUS316
A2represents SUS316

C6-1573-SX-LH-30L

L 代表钢栓长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

旋转 Rotate



顺时针锁紧
Clockwise locking

逆时针锁紧
Lock counterclockwise

1.Material and surface treatment:
Main body： Zamak DIN-EN 1774-ZnAl4Cu1
Steel bolt: iron galvanized

2. Performance parameters:
Protection class: IP65
Unlocking torque: ≤ 0.79N/M
Ultimate load: 700N
Tensioning and stretching amount: 7mm

3. Installation instructions:
Fixed screw torque 10N. M
Fixed nut torque 17N. M
Applicable door panel thickness: 1-5mm

1.材质及表面处理:
主体：5#锌合金
钢栓： 铁镀锌
密封圈：EPDM发泡胶

2.性能参数:
防护等级：IP65
解锁扭矩：小于等于 0.79N/M
极限载荷：400N
拉紧伸缩量：7mm

3.安装说明:
固定螺丝扭矩 10N.M

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM