
compression cam latch **C6-1619**







RL

IP65

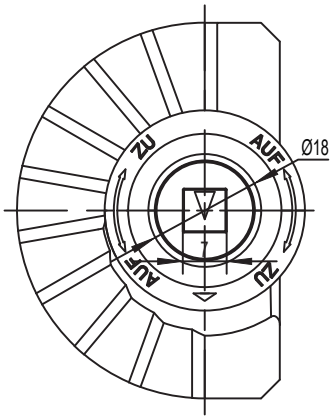

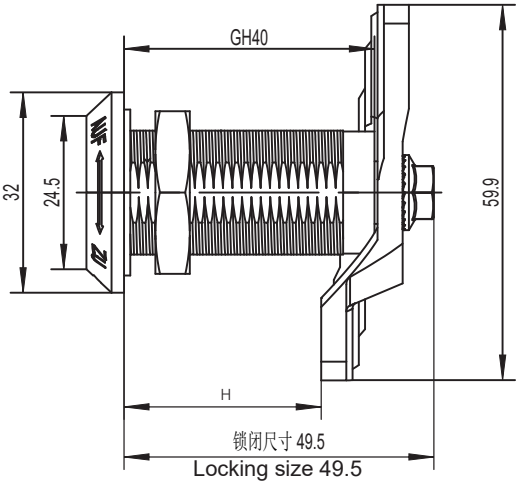



锁芯 Cylinder

447 448

选型 Model selection

锁芯选型
Lock cylinder selection

A1 代表 SUS304
A1 represents SUS304
A2 代表 SUS316
A2represents SUS316

C6-1619-SX-LH-30L

L 代表钢栓长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

旋转 Rotate

L 顺时针锁紧 Clockwise locking

R 逆时针锁紧 Lock counterclockwise

1.Material and surface treatment:
Main body : Zamak DIN-EN 1774-ZnAl4Cu1
Steel bolt: iron galvanized

2. Performance parameters:
Protection class: IP65
Unlocking torque: ≤ 0.79N/M
Ultimate load: 700N
Tensioning and stretching amount: 7mm

3. Installation instructions:
Fixed screw torque 10N. M
Fixed nut torque 17N. M
Applicable door panel thickness: 1-5mm

1.材质及表面处理:
主体：5#锌合金
钢栓：铁镀锌
密封圈：EPDM发泡胶

2.性能参数:
防护等级：IP65
解锁扭矩：小于等于 0.79N/M
极限载荷：400N
拉紧伸缩量：7mm

3.安装说明:
固定螺丝扭矩 10N.M

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM