

C8-1575 compression cam latch




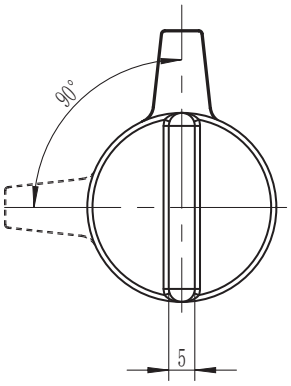

RL

IP65

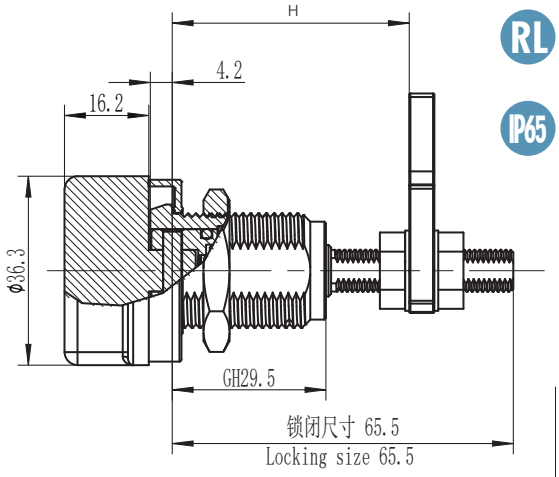

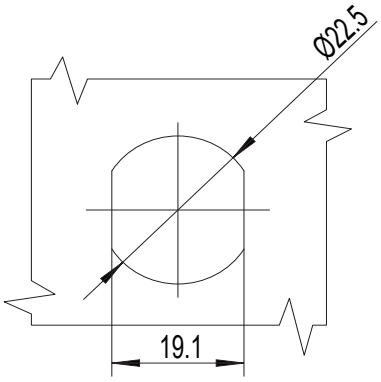

开孔尺寸（Cut out）

选型 Model selection

C8-1575-036-LH-40L

- 30 代表电镀亮铬
  30 represents electroplating bright chrome
  40 代表喷塑亚光黑
  40 represents Black powder coated
  A1 代表 SUS304
  A1 represents SUS304
- L 代表钢栓长度
  L represents the length of the steel bolt
  H 代表有效高度
  H represents effective height

旋转 Rotate



1.Material and surface treatment:
Main body ： Zamak DIN-EN 1774-ZnAl4Cu1
Knob: PA66+30%
Locking plate: iron galvanized
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Unlocking torque: ≤ 0.79N/M
Ultimate load: 700N
Tensioning and stretching amount: 7mm

3. Installation instructions:
Fixed screw torque 10N. M
Fixed nut torque 17N. M
Applicable door panel thickness: 1-15mm

1.材质及表面处理:
主体：5#锌合金
旋钮：PA66+30%
锁片：铁镀锌
密封圈：EPDM发泡胶。

2.性能参数:
防护等级：IP65
解锁扭矩：小于等于 0.79N/M
极限载荷：700N
拉紧伸缩量：7mm

3.安装说明:
固定螺丝扭矩 10N.M
固定螺母扭矩 17N.M
适用门板厚度：1-15mm

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM