


D1-1441 hygienic lock



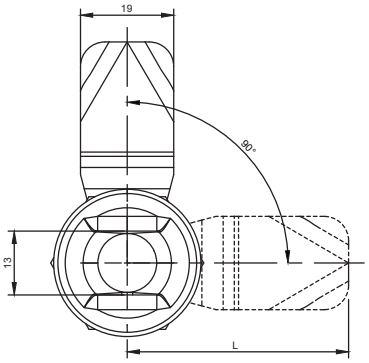



IP69K

SS316 SERIES


RL







锁芯 Cylinder

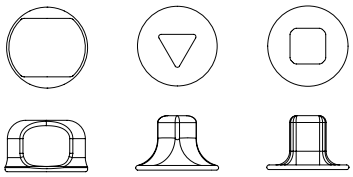

W13 038 048

选型 Model selection

锁芯选型
Lock cylinder selection

A1 代表 SUS304
A1 represents SUS304
A2 代表 SUS316
A2 represents SUS316

D1-1441-SX-LH-A1

L 代表钢栓长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

1.Material and surface treatment:
Main body, Steel bolt: SUS304 or SUS316
Sealing ring: Silica gel.

2. Performance parameters:
Protection class: IP69K

3. Installation instructions:
Fixed screw torque 8N. M
Fixed nut torque 17N. M
Applicable door panel thickness: 1-5mm

1.材质及表面处理:
主体,钢栓: SUS304 或 SUS316
密封圈: 硅胶
2.性能参数:
防护等级: IP69K

3.安装说明:
固定螺丝扭矩 8N.M
固定螺母扭矩 17N.M
适用门板厚度: 1-5mm

如需获得产品3D模型图，请联系 WWW.FORNDLOCK.COM