


D1-1443

hygienic lock

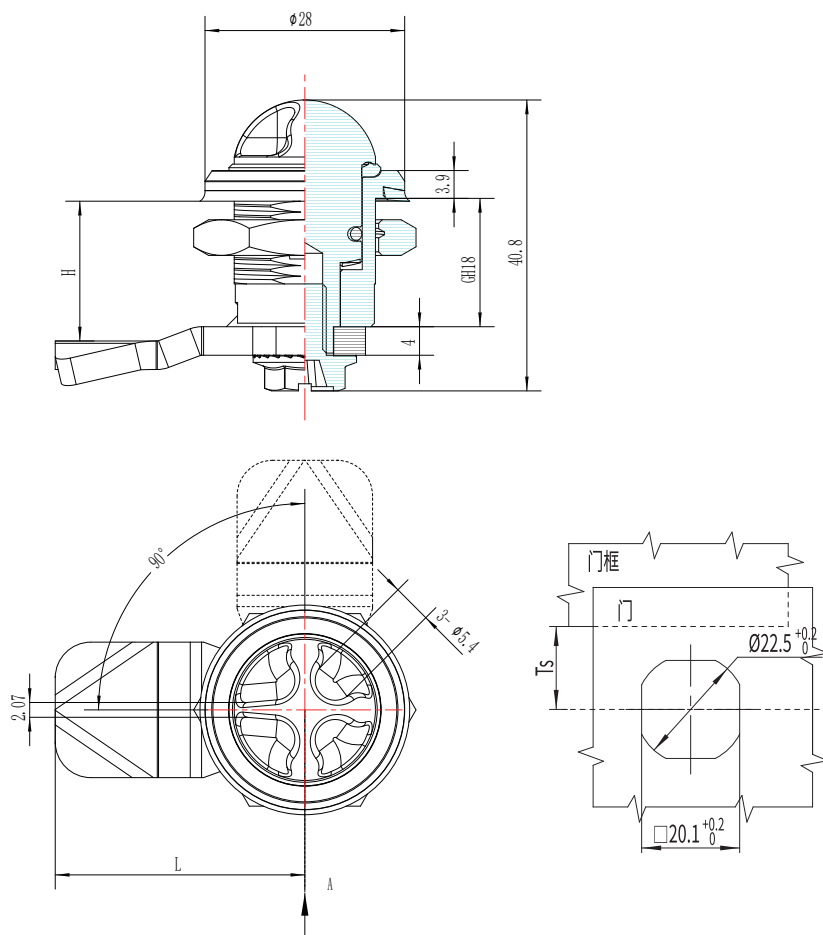


IP69K

STAINLESS STEEL


RL




锁芯 Cylinder




X46



W13



037



048

选型 Model selection

锁芯选型
Lock cylinder selection

D1-1443-SX-LH-A1

A1 代表 SUS304
A1 represents SUS304
A2 代表 SUS316
A2 represents SUS316

L 代表钢栓长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

1. Material and surface treatment:
Body, steel bolt: SUS304 or SUS316
Seal ring: Exposed TPU, dynamic seal ring NBR.
2. Performance parameters:
Protection level: IP69K
Ultimate load: 700N
Unlocking torque: less than or equal to 0.79N/M
3. Installation instructions:
The torque of the Pxing screw is 8N.M
The torque of the Pxing nut is 17N.M
Applicable door panel thickness: 1-3mm

1.材质及表面处理:
主体, 钢栓: SUS304或 SUS316
密封圈: 外露 TPU, 动密封圈 NBR。

2.性能参数:
防护等级: IP69K
极限载荷: 700N
解锁扭矩: 小于等于 0.79N/M

3.安装说明:
固定螺丝扭矩 8N.M
固定螺母扭矩 17N.M
适用门板厚度: 1-3mm

如需获得产品 3D 模型图，请联系 WWW.FORNDLOCK.COM