


D4-1423

Safety lock with dust cover

RL

IP65

SERIES

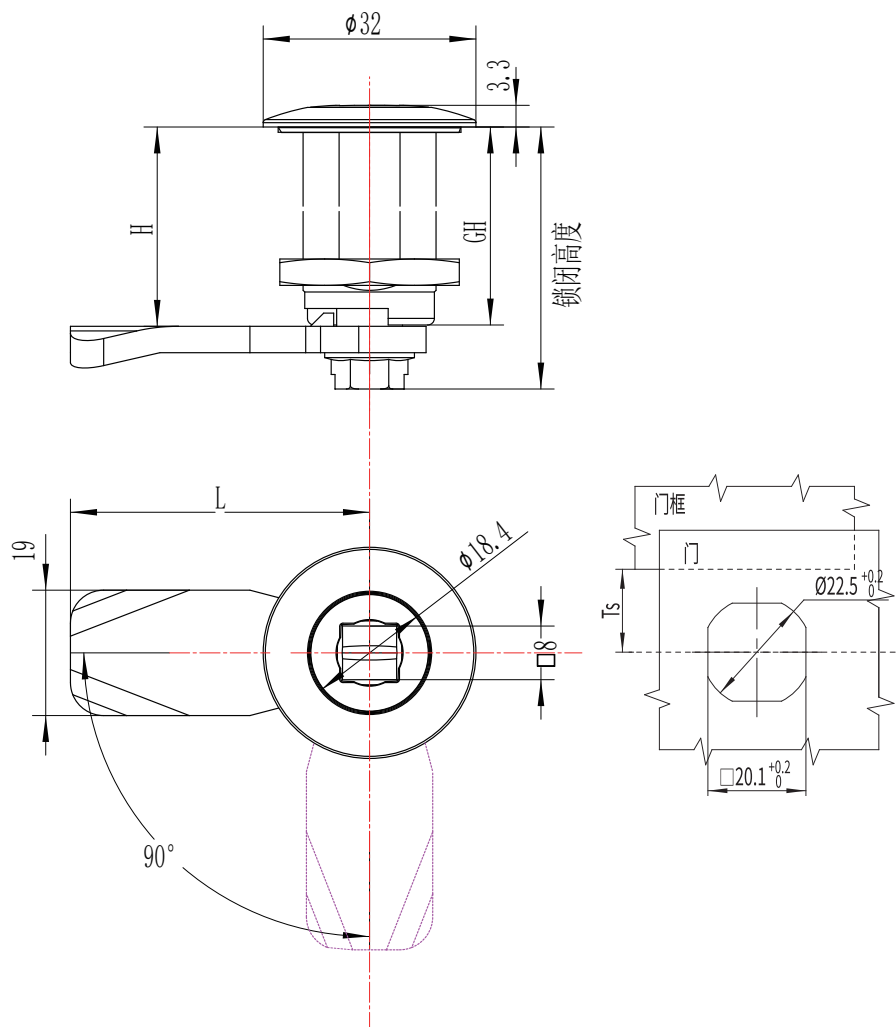

选型 Model selection

18: GH 为 18mm
30: GH 为 30mm
38: GH 为 38mm

137: 7mm 三角带槽
137: 7mm V-belt groove
148: 8mm 四方带槽
148: 8mm square with grooves

A1 代表 SUS304
A1 represents SUS304
A2 代表 SUS316
A2 represents SUS316

D4-1423-YZ-048-LH-A1

L 代表钢柱长度
L represents the length of the steel bolt
H 代表有效高度
H represents effective height

1. Material and surface treatment:
Main body, Steel bolt: SUS304 or SUS316
Lock plate: SUS304
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Unlocking torque: less than or equal to 0.79N.m. Ultimate load: 700 N.
Fixed screw torque: 8-10N.m.
Fixed nut torque: 20-25N.m.
Sliding cover down stroke: 5mm.
Load: 25kg. The sliding cover rebounds normally

3. Installation instructions:
Fixed screw torque: 8-10N.m;
Fixed nut torque: 20-25N.m;
Door panel thickness: Ts=1-23mm

1. 材质及表面处理:
主体为 SUS304 或 SUS316
锁片为 SUS304
防水垫 EPDM

2. 性能参数:
IP 等级: IP65
解锁扭矩: 小于等于 0.79N.m
极限载荷: 700N
固定螺丝扭矩: 8~10N.m
固定螺母扭矩: 20~25N.m
滑盖下压行程: 5mm
负载 25kg, 滑盖回弹正常

3. 安装说明:
固定螺丝扭矩: 8~10N.m
固定螺母扭矩: 20~25N.m
门板厚度: Ts=1-23mm

WWW.FORNDLOCK.COM

如需获得产品 3D 模型图，请联